


## Schottky Diodes

### BAT46WS (KAT46WS)

#### ■ Features

- High breakdown voltage
- Low turn-on voltage
- Guard ring construction for transient protection

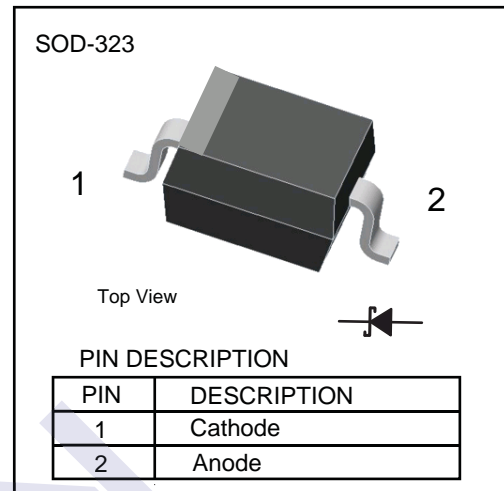

#### ■ Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	V
Working peak reverse voltage	$V_{RWM}$	100	
Continuous Forward Current	$I_F$	150	mA
Non-repetitive Peak Forward Surge Current at 8.3ms	$I_{FSM}$	2.5	A
Power Dissipation	$P_D$	200	mW
Typical thermal resistance	$R_{\theta JA}$	500	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55 to 150	

Note 1. Part mounted on FR-4 board with recommended pad layout.

#### ■ Electrical Characteristics ( $T_a=25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage (Note 2)	$V_{(BR)}$	$I_R = 100\ \mu\text{A}$	100			V
Forward voltage (Note 2)	$V_F$	$I_F = 10\ \text{mA}$			0.45	
		$I_F = 250\ \text{mA}$			1	
Peak Reverse Current	$I_R$	$V_R = 1.5\ \text{V}$			0.3	$\mu\text{A}$
		$V_R = 10\ \text{V}$			0.5	
		$V_R = 50\ \text{V}$			1	
		$V_R = 75\ \text{V}$			2	
Diode capacitance	$C_T$	$V_R = 0\ \text{V}, f = 1\ \text{MHz}$			39	pF
		$V_R = 1\ \text{V}, f = 1\ \text{MHz}$			21	pF

Note 2. Short duration pulse test used to minimize self-heating effect.

#### ■ Marking

Marking	S9
---------	----

# Schottky Diodes

## BAT46WS (KAT46WS)

■ Typical Characteristics

Fig.1 Power Derating Curve

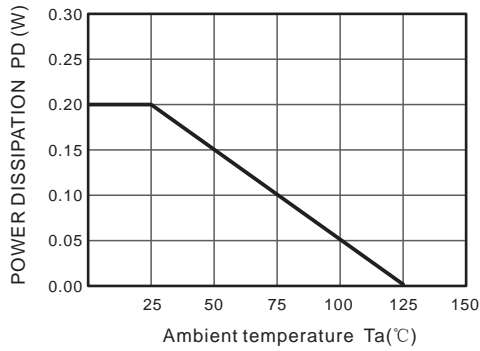


Fig.2 Typical Reverse Characteristics

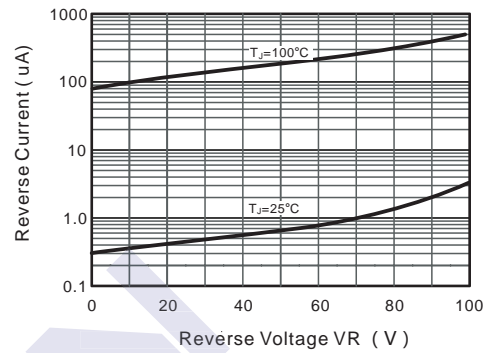


Fig.2 TYPICAL FORWARD VOLTAGE

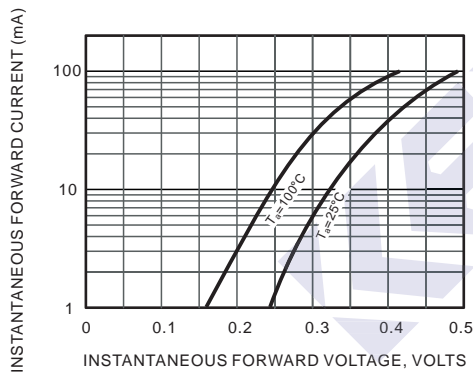


Fig.3 Typical Junction Capacitance

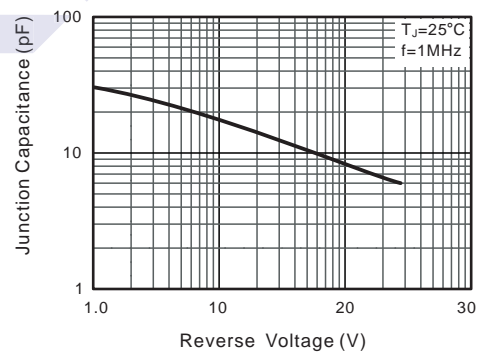


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


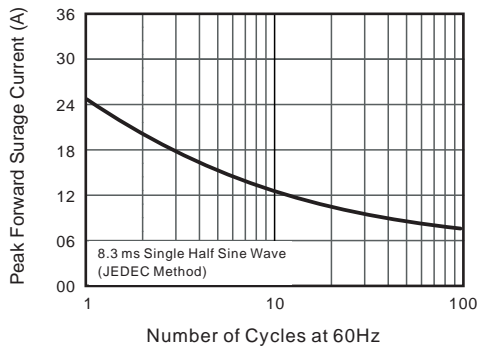


Fig.6 Typical Transient Thermal Impedance

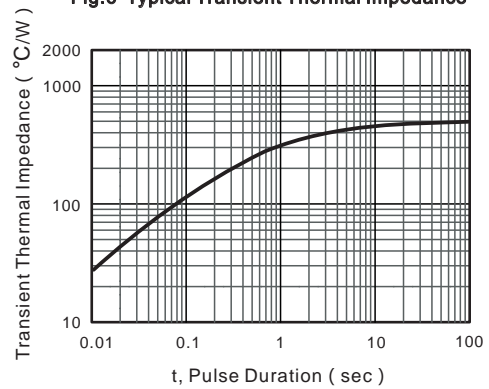


## Schottky Diodes

### BAT46WS (KAT46WS)


#### ■ Package Outline Dimensions

Plastic surface mounted package; 2 leads

SOD-323

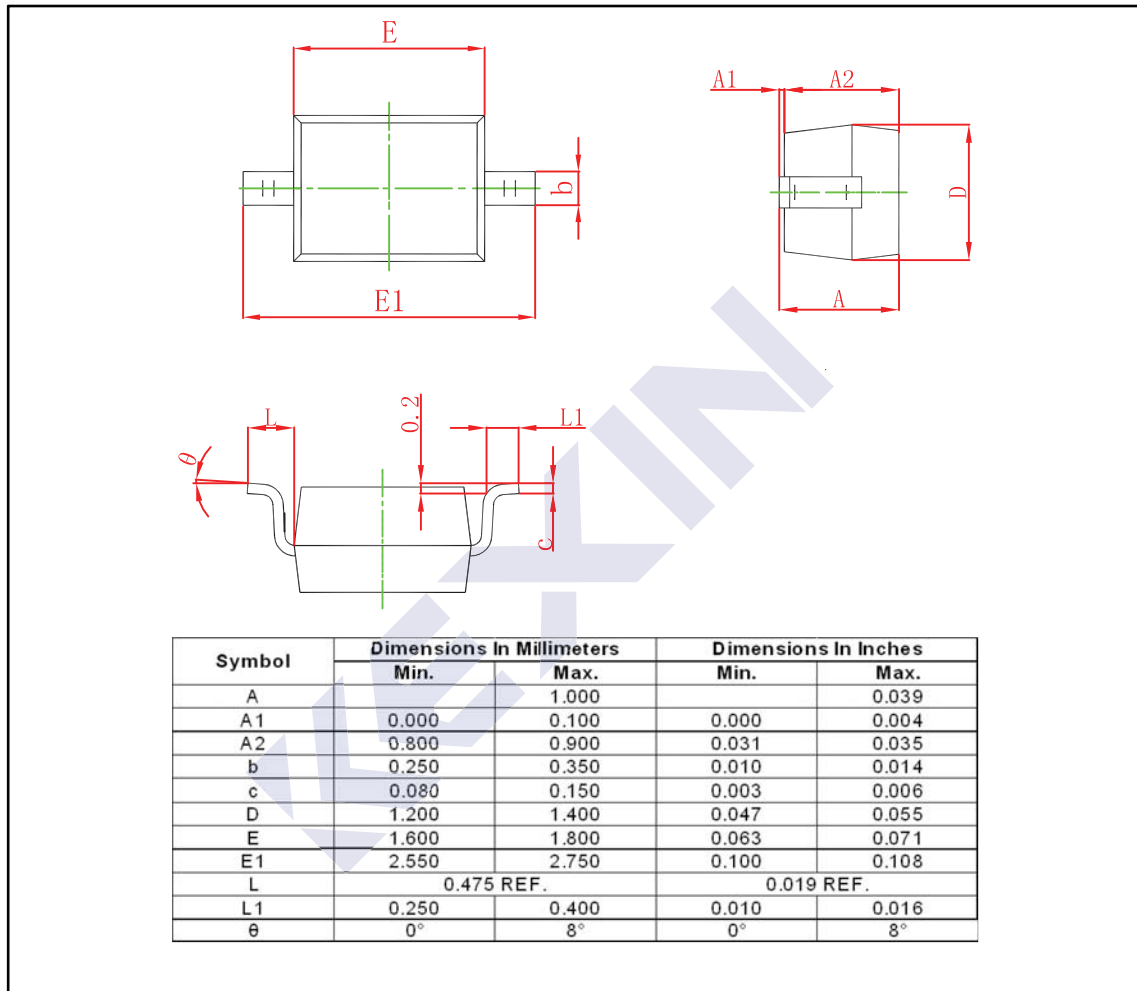

#### ■ The Recommended Mounting Pad Size

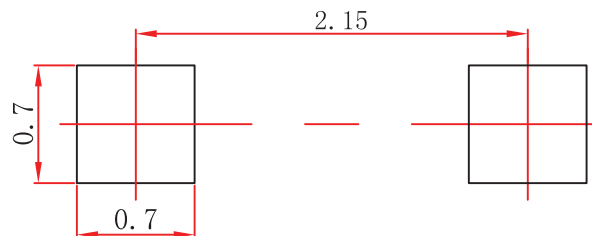

#### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.